

3000mm dia. Ocean Buoy

TRIDENT-3000: Polyethylene Tower

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution



Environmentally Friendly & Recyclable

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.



TRIDENT-3000 Damman Port, Saudi Arabia

The TRIDENT-3000 is one of the largest rotationally-moulded buoys available, with a float diameter of 3 meters and lantern focal height of up to 5 meters.

The float section of the TRIDENT-3000 is built from four (4) rotationally-moulded quadrants, which fasten together to form an incredibly robust 3 meter wide float section standing 1.8 meters tall. Each quadrant is moulded from UV-stabilised, virgin polyethylene, and has a 16mm wall thickness. In addition, each section is filled with closed-cell polyurethane, which prevents the ingress of moisture in the unlikely event of damage.


A galvanised steel or 316-grade stainless steel mooring pole runs through the centre of the assembly, to which the tower section is fastened. Four large lifting eyes aid in buoy mooring and periodic servicing.

The enhanced poly-tower design provides a huge visual area for navaid recognition, and consists of two sealed, rotationally-moulded tower sections. The lower section incorporates a battery access door and houses batteries, controllers and any ancillary electronic payload. The top section incorporates an internal radar reflector and solar mount facility.

Rotationally-moulded panelling is fitted to the outside of the tower section to create a large coloured visual area for marking. The replaceable panelling also simplifies cardinal marking and gives operators flexibility in stocking spare components. No part of the structure requires painting at any stage of the product's life span.

An integrated ladder with harness attachment points runs vertically up the tower to the top of the platform.

A large counterweight offers exceptional stability in a variety of exposed regions. The TRIDENT-3000 can be supplied in all IALA colours.

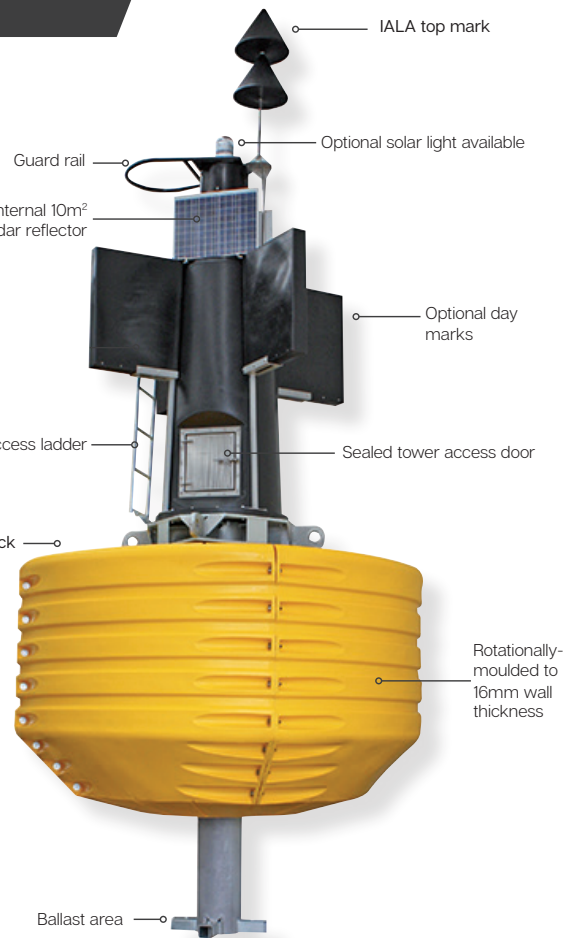

TRIDENT-3000 installation, Port of Newcastle, Australia




TRIDENT-3000 installation, Middle East

The Sealite Advantage

- High visibility red, green, white or yellow as per IALA recommendations
- Robust construction of 4 quadrant hull sections
- Lightweight
- Large battery & payload section
- Excellent buoyancy & stability
- Easy to deploy & service
- Cost effective & environmentally friendly
- Convenient forklift access points to safely manoeuvre the buoy assembly
- No painting, ever

Technical Specifications*

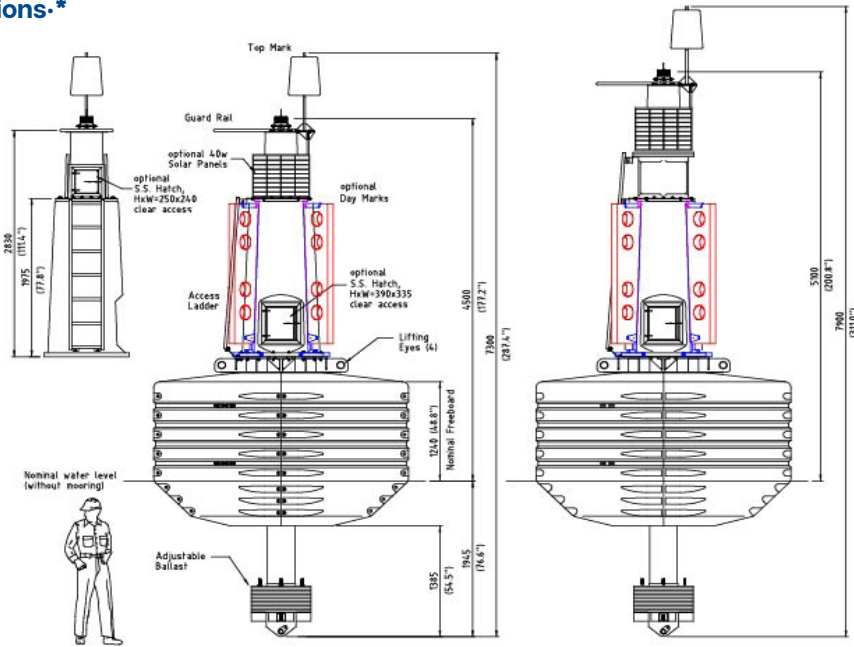

Technical Specifications*

| TRIDENT-3000 | |
|--|---|
| Polyethylene Tower | |
| General Characteristics | |
| Available Colours | Red, Green, White, Yellow as per IALA Recommendations |
| Focal Plane Height (mm/inches) | 4500 / 177.2 |
| Total Float Volume (Itrs/US gallon) | 11000 / 2906 |
| Nominal Freeboard (mm/inches) | 1240 / 48 ³ / ₄ |
| Nominal Draft (mm/inches) | 1945 / 76 ¹ / ₂ |
| Total Reserve Buoyancy (kgs/lbs) | 8750 / 19290 |
| Operational Buoyancy (kgs/lbs) | 3170 / 6990 |
| Maximum Mooring Load (kgs/lbs) | 2750 / 6063 |
| Draft, Maximum (mm/inches) | 2400 / 94 ¹ / ₂ |
| Freeboard, Minimum (mm/inches) | 800 / 31 ¹ / ₂ |
| Safe Working Load, 1pt (kgs/lbs) | 6000 / 13228 (one lifting point) |
| Safe Working Load, 2pt (kgs/lbs) | 8630 / 19025 (two lifting points) |
| Submergence (kg/cm, lb/inches) | 72 / 403 |
| Visual Area (m ² /ft ²) | 7.1 / 76.4 (with daymark) 6.4 / 68.9 (without daymark) |
| Water Area (m ² /ft ²) | 2.1 / 22.6 |
| Physical Characteristics | |
| Material | Rotationally-moulded UV-stabilised virgin polyethylene float section, tower assembly, top marks and panelling. 316-grade stainless steel fixtures. |
| Wall Thickness (mm/inches) | 16 / ⁵ / ₈ |
| Ballast (kg/lbs) | 765 / 1687 external steel |
| Filling | Closed-cell polyurethane foam (float section) |
| Height (mm/inches) | 7900 / 311 |
| Width (mm/inches) | 3000 / 118 ³ / ₄ |
| Mass (kg/lbs) | 2580 / 5688 (depending on payload) |
| Radar Reflector | Echomax |
| Product Life Expectancy | >20 years ^ |
| Certifications | |
| IALA | Surface colours compliant to IALA E-108 |
| Quality Assurance | ISO9001:2015 |
| Intellectual Property | |
| Trademarks | SEALITE® is a registered trademark of Sealite Pty Ltd |
| Warranty * | 5 years |
| Lantern Options | Sealite SL-C310 Series, SL-C510 Series, SL-125 Series or SL-155 Series |
| Options Available | <ul style="list-style-type: none"> • Custom signage • Day marks • Monitoring Systems (AIS, GSM, SATCOM) • Unfilled Float Section • Tower Extension (Focal Plane height: 5100mm / 200³/₄ inches) • Galvanised or stainless steel mooring post • Flat bottom mooring post or dual mooring eyes |

We believe technology improves navigation™



Sealite Pty Ltd
Australia
+61 (0)3 5977 6128

Sealite Asia Pte Ltd
Singapore
+65 6829 2243

Sealite United Kingdom Ltd
UK
+44 (0) 1502 588026

Sealite USA LLC
USA
+1 (603) 737 1311



* Subject to standard terms and conditions * Intensity setting subject to solar availability
 * Specifications subject to change or variation without notice * Refer to the Sealite website under the warranty section

